



IECEX

ATEX

CE

RoHS

IP

66

Ta

55

Ta

-40



Ex marking: Ex de op is IIC T5 Gb

Ex op is tb IIIC T95°C Db, IP66



## Application



- It can be widely used in petrochemical plants, oil platforms, oil pump housing, transit stations and other flammable and explosive places as fixed lighting.
- Gas explosive environment: Group IIA, IIB, IIC.
- Zone1, Zone2; Zone21, Zone22

## Characteristics

- It is made using a special aluminum housing, suitable for long-term highly corrosive environment of offshore platforms, chlor-alkali, hydrogen sulfide, etc.
- Derrick mounting fixture adopt high anti-corrosive aluminum and locking angle equipment, can be safely used in drilling platforms and high vibration environment.
- The anti corrosion, abrasion proof, power coated cover which is dust proof, water proof, make the lamp an excellent high pressure environment
- Bracket, reflector, guard, and all exposed fasteners adopt 304 stainless steel (customizable 316), can effectively guarantee the strength and strong anti-corrosion performance of lamp
- Terminals are provided at both ends, can be directly wired in parallel, eliminating the junction box and installation costs.

A variety of installation as optional: ceiling, oil derrick, the side walls, curved rods, boom, etc.

## Light distribution curve

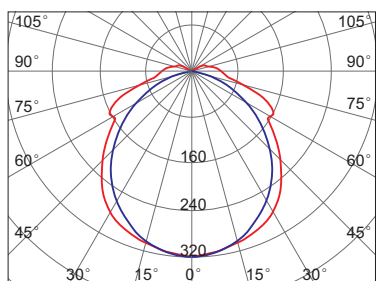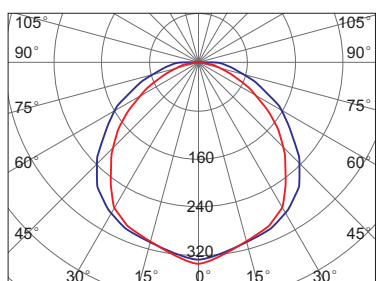

## Main Specification


Item	Technical Parameters			
Rated wattage (W)	2×20W(T8 )	2×10W (T8)	2×28W (T5)	2×14W (T5)
Input voltage range (V)	90~264VAC		220~240VAC, 110VAC	
Rated frequency	50Hz / 60Hz		50Hz / 60Hz	
Light source	LED		Fluorescent	
Light output (lm)	3600	1800	3400	1700
CRI (Ra)	80		70	
Life time (h)	50,000		8,000	
CCT	5000K		6500K	
Cable entry thread	M20×1.5,M25×1.5, G3/4",NPT1/2",NPT3/4"			
Terminals	Multi core: ≤2.5mm <sup>2</sup>			
	Single core: ≤4mm <sup>2</sup>			
Dimension (mm)	1390×180×110	780×180×110	1390×180×110	780×180×110
Net weight (kg)	10.7	6.6	10.7	6.6

# BC5401 LED Explosion Proof Light



Drawing of dimension (Dimensions in mm)

## Ceiling mounting

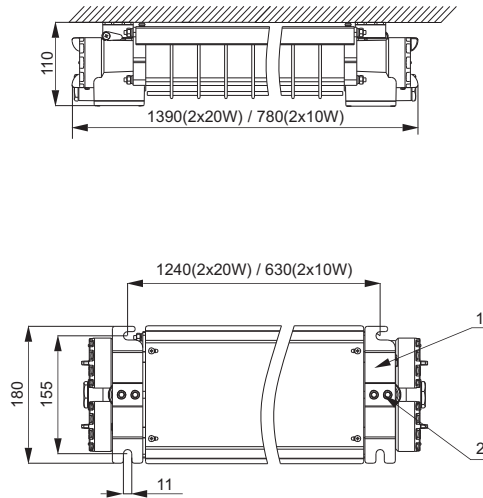


## Lamps Ordering Information

Order No.	Mounting type	Lamp power	Equivalent to
			Fluorescent
BC5401-L20A	Ceiling	2 × 10W	2 × 20W
BC5401-L40A		2 × 20W	2 × 40W

## Fitting Ordering Information (Standard)

Order No.	No.	Specifications Model	Quantity
P01	1	Ceiling Bracket	2
	2	M8 Inner six angle bolt	4

## Derrick mounting

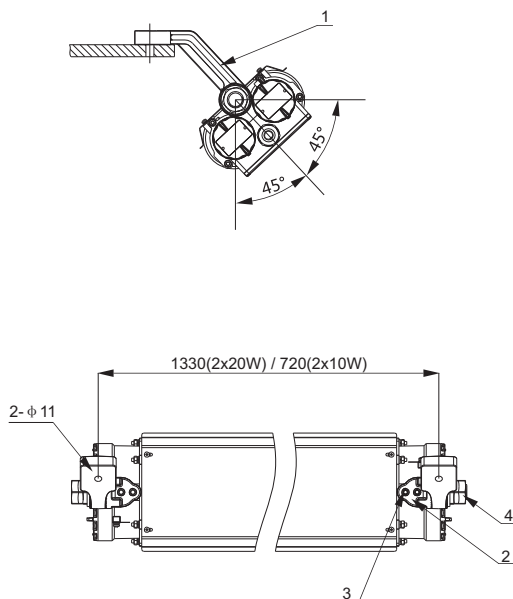


## Lamps Ordering Information

Order No.	Mounting type	Lamp power	Equivalent to
			Fluorescent
BC5401-L20A	Derrick type	2 × 10W	2 × 20W
BC5401-L40A		2 × 20W	2 × 40W

## Fitting Ordering Information(Optional)

Order No.	No.	Specifications Model	Quantity
P02	1	Derrick bracket	2
	2	Base	2
	3	M8 Inner six angle bolt	4
	4	M24 screw	2

## Side wall mounting

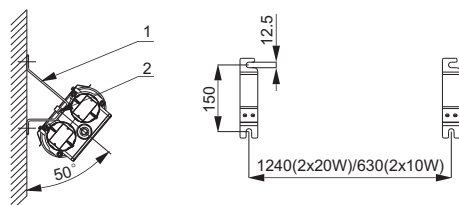


## Lamps Ordering Information

Order No.	Mounting type	Lamp power	Equivalent to
			Fluorescent
BC5401-L20A	Side wall	2 × 10W	2 × 20W
BC5401-L40A		2 × 20W	2 × 40W

## Fitting Ordering Information (Optional)

Order No.	No.	Specifications Model	Quantity
P03	1	Sidewall bracke	2
	2	M10 Inner six angle bolt	4

## Pole mounting

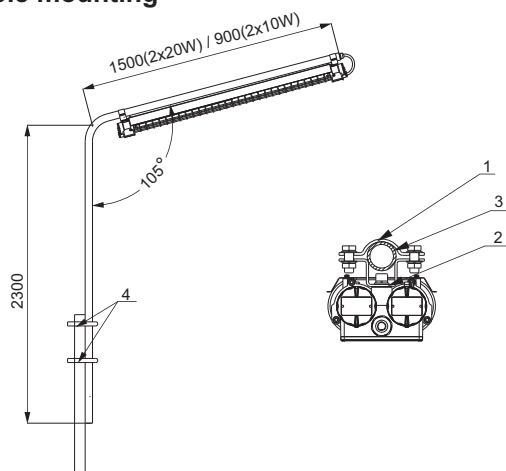


## Lamps Ordering Information

Order No.	Mounting type	Lamp power	Equivalent to
			Fluorescent
BC5401-L20A	Pole	2 × 10W	2 × 20W
BC5401-L40A		2 × 20W	2 × 40W

## Fitting Ordering Information (Optional)

Order No.	No.	Specifications Model	Quantity
P04	1	Upper hoop	2
	2	Under hoop	2
	3	DN32 Poles	1
	4	U tube clip	2

## Ceiling mounting 2

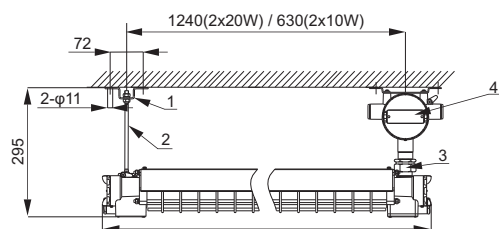

## Lamps Ordering Information

Order No.	Mounting type	Lamp power	Equivalent to
			Fluorescent
BC5401-L20B	Ceiling	2 × 10W	2 × 20W
BC5401-L40B		2 × 20W	2 × 40W

## Fitting Ordering Information (Optional)

Order No.	No.	Specifications Model	Quantity
P05	1	Pole mounting bracket	1
	2	19cm Screw(M8)	1
P02	3	Connector G3/4" male- male	1
BHD01	4	Explosion proof junction box	1



## **Smart Technology Systems (PVT) LTD.**

Office # 508, 5th Floor, Park Avenue Building,  
Plot No. 24-A, P.E.C.H.S., Block 6,  
Shahrah-e-Faisal, Karachi-75350, Pakistan.

Phone: +92 (0) 21-3437001-02

Fax: +92 (0) 21-34327002

Email: [shahid.ahmed@smarttechnologiesystems.com](mailto:shahid.ahmed@smarttechnologiesystems.com)

Web Site: [www.smarttechnologiesystems.com](http://www.smarttechnologiesystems.com)